



## 65S0A25PT

### 65" AIR CONDITIONED - ALL WEATHER DISPLAY

Hisense All Weather Digital Signage Display's are ideal for any retail and business environments. Our 2500nit high-bright screen provides clear content ensuring maximum engagement in any lighting conditions. The IP65 Air Conditioned cooled enclosure protects components in any conditions all year round with no filter maintenance required.

#### Highlights



#### IP Rated All Weather Displays

The IP65 rating provide full protection against dust and water projection. Built in intelligent heating and cooling, together with a smart automatic air circulation system. Anti vandal glass for protection from extreme environmental conditions and impacts to the display.



#### Safety Lock and Invisible Screws and Hinges

With Professional three-point anti-theft lock design, internal locking of bolts, no exposed high-strength steel doors, Hisense Outdoor Display can prevent criminals from picking locks and doing malicious damage.



#### Smart Brightness Sensor

Adjusts the brightness of the monitor automatically according to the surrounding lighting conditions. This feature considerably reduces power consumption and increases the monitor's lifetime.



#### Visible With Polarized Sunglasses

2,500 nits LCD to give you a clear image, even in direct sunlight. Enables clear visibility even when the viewer is wearing polarized sunglasses.




#### Easy Maintenance

Telecom-class routing design ensures the cabinet sealing performance. Front door access with lock for both wall mount monitor and kiosk models for easy operation and maintenance.



#### Efficient Heat Dissipation Management

Professional software for thermal simulation for cooling system design, which cools down the heat generated from every part of the product with high performance, preventing outside air from entering.

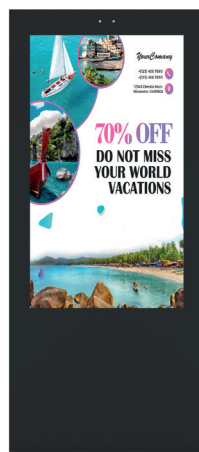

## Specifications

### General

|                         |                   |
|-------------------------|-------------------|
| Screen Size             | 65"               |
| Screen Active Area (mm) | 1428 x 804        |
| Resolution              | UHD (3840 x 2160) |
| Aspect Ratio            | 16:9              |
| Brightness (nit)        | 2500nits          |
| Contrast Ratio          | 1200:1            |
| Viewing Angle (H/V)     | 178°/178°         |
| Backlight Life Cycle    | 50,000 Hrs        |
| Operation Hours         | 24/7              |
| Response Time           | 8ms               |
| Screen Orientation      | Portrait          |

### Touchscreen (Option)

|               |            |
|---------------|------------|
| Touch Type    | Touch foil |
| Touch Point   | 10-points  |
| Response Time | ≤10ms      |

### System

|          |  |
|----------|--|
| OS       | Android 7.1  |
| CPU      | Amlogic Quad-core Cortex-A53,1.5GHz                |
| GPU      | Mali-450   |
| DDR      | 2G DDR4  |
| ROM      | 16G EMMC (support expanded memory card up to 128G) |
| Language | Chinese/English                                    |

### Connectivity

|        |   |
|--------|---|
| Input  | x2 HDMI IN/ x1 USB2.0/ x1 LAN x1 TF card slot/ x1 RS232 |
| Output | x1 HDMI OUT/ x1 AV OUT                                  |

### Network connection

|                  |          |
|------------------|----------|
| Wifi or LAN      | Yes      |
| 3G/4G Connection | Optional |

### Speaker

|                  |     |
|------------------|-----|
| Build in Speaker | Yes |
|------------------|-----|

### Thermal management

|                          |                 |
|--------------------------|-----------------|
| Build in air conditioner | Air conditioner |
| Overheating Protection   | Yes             |

### Physical

|                    |   |
|--------------------|---|
| IP Rating          | IP65                                    |
| Glass              | 6.8 mm (AR, Tempered & Laminated Glass) |
| Metal              | Galvanized steel with powder coated     |
| Standard Color     | Black                                   |
| Dimensions         | 2350(H) x 1024(W) x 235(D) mm           |
| Net Weight         | 230kg                                   |
| Packing Dimensions | 2560(H) x 1160(W) x 580(D) mm           |

### Operation

|                                       |               |
|---------------------------------------|---------------|
| Working Environment                   | Full outdoor  |
| Auto Brightness Control               | Light sensor  |
| Operation Temperature (ambient temp.) | -40°C to 55°C |
| Operation Humidity                    | 5% to 95%     |

### Power

|                   |                      |
|-------------------|----------------------|
| Power Supply      | AC 110 /220V,50/60Hz |
| Power Type        | Built-In Power       |
| Power Consumption | 1200W(Max.)          |

### Dimensions

**65"** | 2350 x 1024 x 235mm  
230kg

